


## Architrave Switches

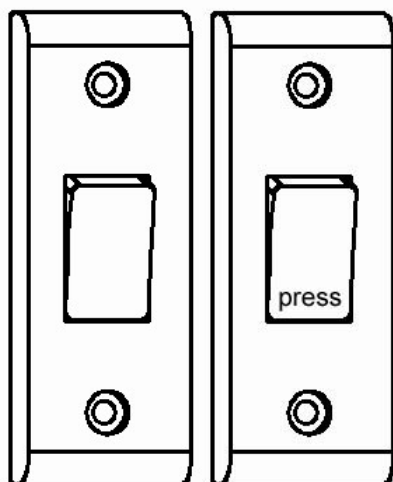

### Description

This uniquely shaped range in the Deta Slimline style is easy to install, has clear white terminal markings and is supplied in individual protective bags.

This range of switches does not have to be de-rated for fluorescent loads.

### Features

- unique slim profile with curved top and bottom edges
- concave rockers
- 3mm contact gap
- only one size 4mm screwdriver needed
- clear white markings
- grey font engraving
- terminals have large lead-ins
- fixing screw attached to rear of frontplate
- 25 year guarantee

### Range

1g 1w	S1320
1g 2w	S1321
2g 2w	S1322
1g push to make/break 2w 'press'	S1323
1g push to make 1w – bell symbol	S1323B

### Technical Specification

voltage rating	250Vac
current rating	10A
	X rated
contact gap	3mm
plate size	85 x 34 x 7mm

no user serviceable parts

### Standards

- BS EN 60669-1:2000

### Back Boxes

minimum recommended depth

	flush 27mm	dry lining 35mm	surface 16mm
1g	DB169	n/a	V1324
2g	n/a	n/a	V1325

### Terminal Capacity

	1mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
L	5	4	2	1

**DETA**

Kingsway House, Laporte Way  
Luton, Beds LU4 8RJ

Tel. +44 1582 544 500 Fax: +44 1582 544 501  
Technical Helpline +44 1582 544 548