


## Connection Units

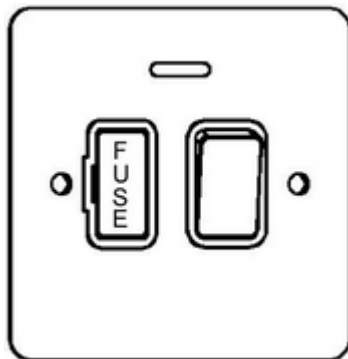

### Description

This uniquely styled range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual display boxes.

### Features

- 1.5mm thick front plate
- concave rockers
- only one size 4mm screwdriver needed
- clear white terminal markings
- colour coded terminals
- grey font engraving
- discreet neon
- neon leads enclosed
- protective film on frontplate
- fuse carrier can be padlocked in the out position (not supplied)
- 2 earth terminals
- terminals have large lead-ins
- 25 year guarantee

### Range

unswitched	8141
switched	8142
switched, neon	8143
switched, neon & front flex outlet	8144

- prefix with finish and insert colour

### Finishes

Chrome (CH)	with white or black inserts
Satin Chrome (SC)	with white or black inserts
Gold (GD)	with white inserts
Black Nickel (BN)	with black inserts

### Technical Specification

voltage rating	250Vac
current Rating	13A
contact gap	3mm

no user serviceable parts, except BS 1362 fuse links

### Back Boxes

minimum recommended depth

	flush 35mm	dry lining 35mm
1g	DB164	DB2540

### Standards

- BS 1363 Part 4 : 1995
- Fuses – BS 1362

### Terminal Capacity

	2.5mm <sup>2</sup>	4mm <sup>2</sup>	6mm <sup>2</sup>	10mm <sup>2</sup>
L & N	4	3	2	1

## DETA

Technical Helpline +44 1582 544 548  
Kingsway House, Laporte Way  
Luton, Beds LU4 8RJ  
Tel. +44 1582 544 500 Fax: +44 1582 544 501