


High Current Switches

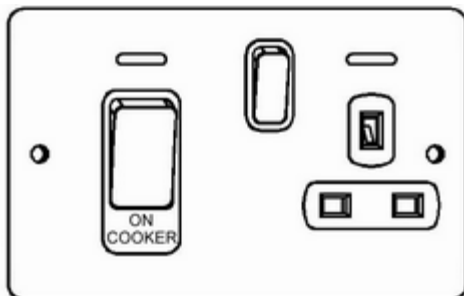

Description

This uniquely styled range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual display boxes.

Features

- 1.5mm thick front plate
- concave rockers
- clear white terminal markings
- colour coded terminals
- grey font engraving
- discreet neon
- neon leads enclosed
- 2 earth terminals
- terminals have large lead-ins
- protective film on frontplates
- 25 year guarantee

Range

45A DP tall, neon	8152
45A DP Cooker	8154
Control Unit, neon	
20A DP, neon	8156
45A DP, neon	8160

- prefix with finish and insert colour

Finishes

Chrome (CH)	with white or black inserts
Satin Chrome (SC)	with white or black inserts
Gold (GD)	with white inserts
Black Nickel (BN)	with black inserts

Technical Specification

voltage rating	250Vac
current Rating	45A or 20A
contact gap	3mm

no user serviceable parts

Back Boxes

minimum recommended depth

	flush 35/46mm	dry lining 35/46mm
20A	DB164	DB2540
45A	DB167	DB2543

Standards

- BS EN 60669-1 : 2000

Terminal Capacity

L & N	2.5mm ²	4mm ²	6mm ²	10mm ²
20A	4	2	1	1
45A	-	3	2	1

DETA

Technical Helpline +44 1582 544 548
Kingsway House, Laporte Way
Luton, Beds LU4 8RJ
Tel. +44 1582 544 500 Fax: +44 1582 544 501