


Socket Outlets

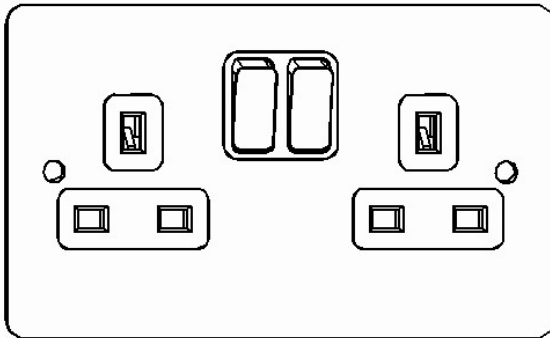

Description

This uniquely styled range is easy to install, with coloured terminals, clear white terminal markings and is supplied in individual display boxes.

Features

- 1.5mm thick front plate
- concave rockers
- only one size 4mm screw driver needed
- clear white terminal markings
- colour coded terminals
- top facing terminal screws
- terminals have large lead-ins
- 2 earth terminals on 13A sockets
- protective film on frontplates
- 25 year guarantee

Range

13A 1g switched DP	8131
13A 2g switched DP	8132
5A 1g unswitched	8138

- prefix with finish and insert colour

Finishes

Chrome (CH)	with white or black inserts
Satin Chrome (SC)	with white or black inserts
Gold (GD)	with white inserts
Black Nickel (BN)	with black inserts

Technical Specification

voltage rating	250Vac
current rating	13A or 5A
contact gap	3mm

no user serviceable parts

Back Boxes

minimum recommended depth

	flush 35mm	dry lining 35mm
1g	DB164	DB2540
2g	DB165	DB2541

Standards

- 13A socket - BS 1363 Part 2 : 1995
- 5A socket - BS546 : 1950

Terminal Capacity

	2.5mm ²	4mm ²	6mm ²	10mm ²
L & N	4	3	2	1

DETA

Technical Helpline +44 1582 544 548
Kingsway House, Laporte Way
Luton, Beds LU4 8RJ
Tel. +44 1582 544 500 Fax: +44 1582 544 501