


## Plate Switches

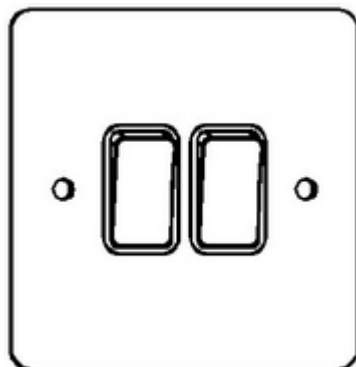

### Description

This uniquely styled range is easy to install, clear white terminal markings and is supplied in individual display boxes.

### Features

- 1.5mm thick front plate
- concave rockers
- protective film on front plate
- only one size 4mm screw driver needed
- clear white terminal markings
- terminals have large lead-ins
- range can be expanded using Gridswitch range
- 25 year guarantee

### Range

1g 2w	8101
2g 2w	8102
3g 2w	8103
4g 2w	8104
Intermediate	8106
3 pole fan isolator	8107

- prefix with finish and insert colour

### Finishes

Chrome (CH)	with white or black inserts
Satin Chrome (SC)	with white or black inserts
Gold (GD)	with white inserts
Black Nickel (BN)	with black inserts

### Technical Specification

voltage rating	250Vac
current Rating	10A X rated
contact gap	3mm

no user serviceable parts

### Back Boxes

minimum recommended depth

	flush 25mm	dry lining 35mm
1-3g	DB162	DB2540
4g	DB163	DB2541

### Standards

- BS EN 60669-1 : 2000

### Terminal Capacity

	1mm <sup>2</sup>	1.5mm <sup>2</sup>	2.5mm <sup>2</sup>	4mm <sup>2</sup>
L	5	4	2	1

**DETA**

Technical Helpline +44 1582 544 548  
Kingsway House, Laporte Way  
Luton, Beds LU4 8RJ

Tel. +44 1582 544 500 Fax: +44 1582 544 501