


Red Socket Outlets

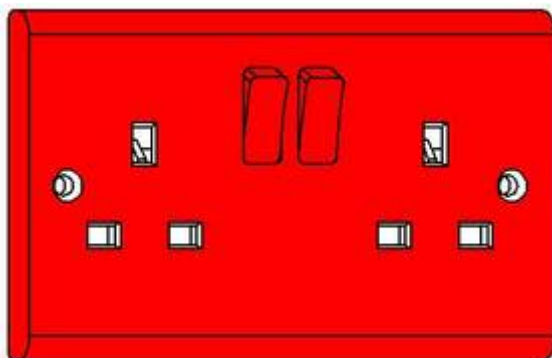

Description

A range of switched sockets with highly visible red rockers and/or face plates, incorporating outboard switches, for use in areas where it is necessary to permanently highlight essential supply circuits.

Features

- unique slim profile with curved top and bottom edges
- concave rockers
- only one size 4mm screwdriver needed
- clear white markings
- colour coded terminals
- top facing terminal screws
- DP switch versions
- 2 earth terminals on DP sockets
- terminals have large lead-ins
- outboard switches
- red rockers and/or faceplates
- 25 year guarantee

Range

| | |
|---|-------|
| 2g switched socket with red rockers and white faceplate | S1291 |
| 2g switched socket with red rockers and red face plate | S1292 |
| 2g switched socket with white outboard rockers and white faceplate | S1293 |
| 2g switches socket with red outboard rockers and white faceplate | S1294 |
| 2g switched socket with red outboard rockers and red faceplate | S1295 |
| 2g switched socket with white outboard rockers, white faceplate and clean earth | S1296 |

Technical Specification

| | |
|----------------|----------------|
| voltage rating | 250Vac |
| current Rating | 13A per outlet |
| contact gap | 3mm |

no user serviceable parts

Back Boxes

minimum recommended depth

| | flush 25mm | dry lining 35mm | surface 25mm |
|----|---------------|--------------------|-----------------|
| 1g | DB162 | DB2540 | V1221 |
| 2g | DB163 | DB2541 | V1223 |

Standards

- BS 1363 Part 2 : 1995

Terminal Capacity

| | 2.5mm ² | 4mm ² | 6mm ² | 10mm ² |
|-------|--------------------|------------------|------------------|-------------------|
| L & N | 4 | 3 | 2 | 1 |

DETA

Kingsway House, Laporte Way
Luton, Beds LU4 8RJ

Tel. +44 1582 544 500 Fax: +44 1582 544 501
Technical Helpline +44 1582 544 548